

TRANSLINK

FIRE RANGER FIRE – SERIES

CF-180 CF-220 CF-225 CF-235




City and Town Fire & Rescue



Harbour and Airport Security

CONTROL WITH PRECISION AND SAFETY

- Fully hydraulic controls
- Dual Controls at ground and cage
- Entry into the cage from the ground
- Safety Link Boom System
- Near Vertical Operation
- Single Lever Control for raising 2 booms
- High strength tubular steel cage
- Huge payloads
- Rugged and stable
- Clever Boom design allows low travel height
- Mounts on all makes of truck
- Full range of options including custom line and civil defence bodies
- A Frame jacks for narrow width
- Meets and exceeds UK and European Standards

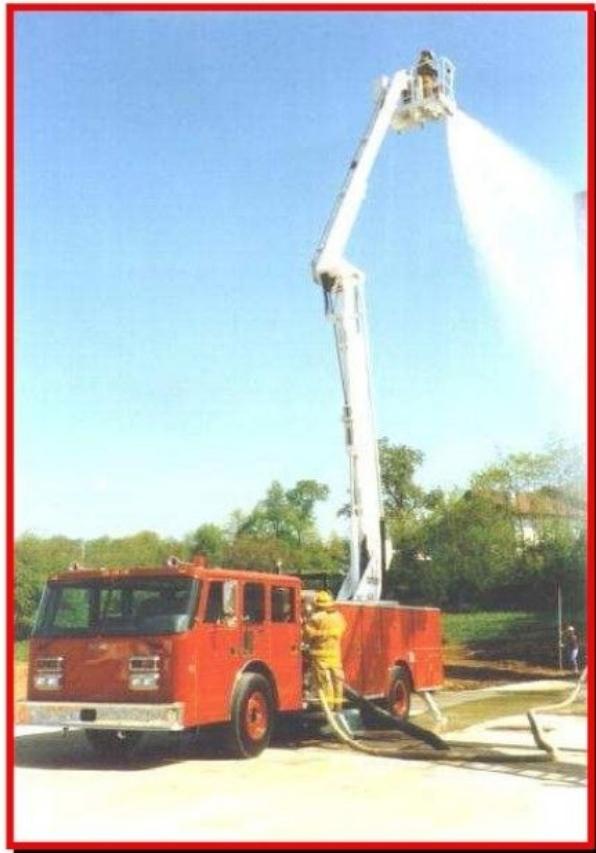


*Petro-Chem and Factory
High Capacity Water operation
Up and over obstacles*

FAILSAFE, FAST & FIRM

FIRE RANGER

FIRE – SERIES

CF-180 CF-220 CF-225 CF-235




Pump and monitor options – with manual monitor as standard but foam, powder and remote control options available.

Standard Features:

Options: Consult factory on all options

- ◆ Amplifier Intercom (2 way or 3 way)
- ◆ 110V @ cage; engine start/stop in cage
- ◆ Jack warning lights
- ◆ Line & custom bodies, crew cabs,
- ◆ Diesel Standby engine (Petrol standard)
- ◆ Full spares kit 1, 3 or 5 years operation
- ◆ Jackless option with heavy duty anti roll bars
- ◆ Remote control and dry powder monitor

- ◆ Heavy duty construction
- ◆ Dual levelling steel cables for double safety
- ◆ 4 telescopic jacks with integral lock valves
- ◆ Full cylinder cushioning at stroke end
- ◆ Booms painted High Gloss White
- ◆ 360 degrees continuous rotation
- ◆ Mounted with decking, pump and PTO
- ◆ Full 2 year manufacturer's warranty

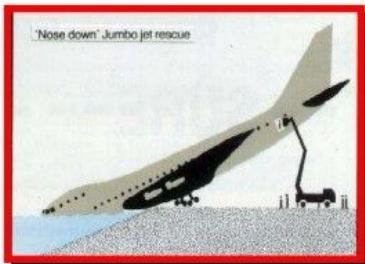

Large high strength tubular steel cage with full hydraulic controls, safety belt anchor points, work light(s), 24v electric take off point, cage lifting eye, rescue line and manual water & foam monitor. Optional paint colours (standard white).



SPECIFICATIONS

RANGER Model Code	CF-180	CF-220	CF-225	CF-235
Working height	18.0m	22.0m	22.5m	23.5m
Platform height	16.0m	20.0m	20.5m	21.5m
Maximum outreach	9.00m	11.0m	12.05m	12.05m
Max. safe working load (dry)	350kg	425kg	320kg	320kg
Cage Lifting Eye	350kg	425kg	320kg	320kg
GVW minimum	14.22 tonne	16.29 tonne	16.29 tonne	16.29 tonne
Stabiliser spread	3.05m	4.22m	4.22m	4.22m
TYPICAL OVERALL TRAVELLING DIMENSIONS				
Length	9,050mm	11,000mm	11,660mm	11,850mm
Width	2,500mm	2,500mm	2,500mm	2,500mm
Height (subject to truck details)	3,500mm	3,500mm	3,500mm	3,500mm

TRANSLINK International Sales Ltd.,

The Pigpen, Mill Farm, Farlow, Kidderminster, Worcestershire, DY14 0LP. UK

Tel.: +44 (0)1746 718 740 Fax : +44 (0) 1746 718 540

E-mail: translink-international@dial.pipex.com - www.translink-international.com