


FIRE RANGER FIRE – SERIES

SF-370 SF-420 SF-540

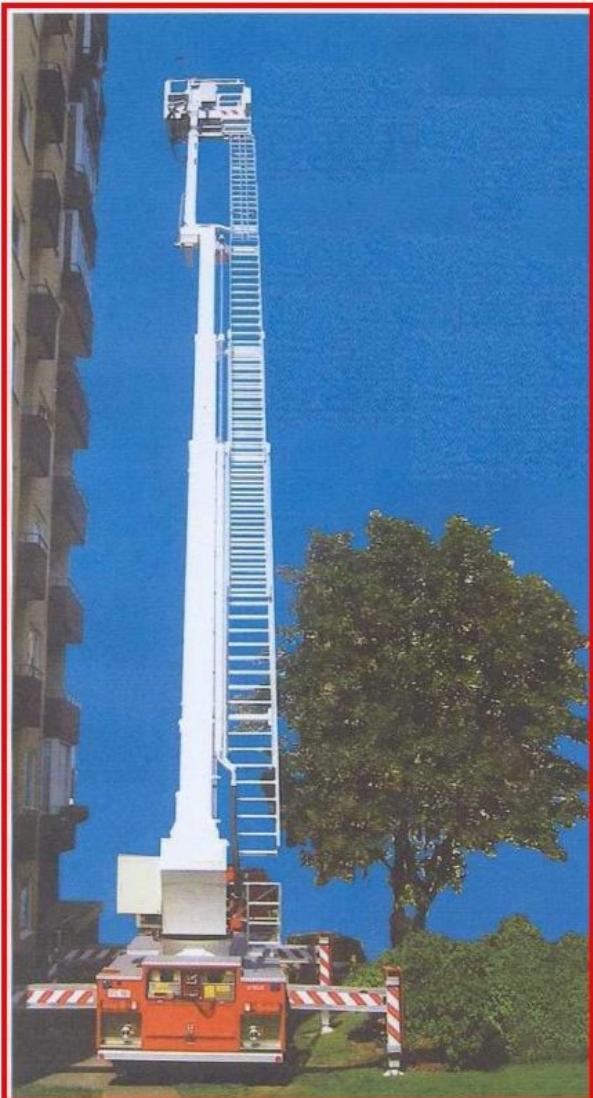

Pinpoint Accuracy – Safe & Effective Fire Fighting

- ◆ Fully hydraulic proportional controls
- ◆ Self-centring joystick controls
- ◆ Up and over reach facility
- ◆ Dual control position
- ◆ Rotating cage and narrow jacking options

Designed to meet and exceed all
International standards
CE Marked - EN 1777



The FIRE-RANGER SF Series is
mountable onto a wide range of chassis
types to suit all applications

FIRE-RANGER SF Series

- ◆ 2, 3 & 4 stage reverse articulated steel booms with no knuckle projection zero tail swing
- ◆ Automatic cage levelling
- ◆ Four hydraulic stabilisers with boom interlocks with independent control
- ◆ 360° continuous rotation
- ◆ Power by PTO unit fitted to vehicle with interlock indicator
- ◆ Very large outreach
- ◆ Boom ladder package with automatic rung alignment
- ◆ Custom designed bodywork and fire fighting packages with water and foam pumps; stainless steel tanks and locker solutions

FIRE RANGER FIRE – SERIES

SF-370 SF-420 SF-540

Large high strength stainless steel cage with 4 doors and space to enter wheelchair, water monitor and water hose connection(s)



SF-550 on Mercedes Actros chassis with custom fire engineering bodywork and fixed pump installation



Superb cage access at ground level with fold-down front platform for stretcher & wheelchair rescue with room for 5 adults



Full control of all cage movements and machine functions. User-friendly and easy to operate.



Rigorous testing to the highest international standards

SPECIFICATIONS

RANGER Model Code	SF-370	SF-420	SF-540
Working height	37.0m	42.0m	54.0m
Maximum outreach	22.0m	22.0m	22.0m
Maximum safe working load	400kg	400kg	400kg
Length	9,700mm	11,200mm	12,000mm
Width	2,500mm	2,500mm	2,500mm
Height (subject to truck details)	4,100mm	4,200mm	4,400mm

TRANSLINK International Sales Ltd.,

The Pigpen, Mill Farm, Farlow, Kidderminster, Worcestershire, DY14 0LP. UK

Tel : +44 (0)1746 718 740 Fax : +44 (0) 1746 718 540

E-mail: translink-international@dial.pipex.com